

PRODUCT CATALOGUE

FOUNTAIN
PUMPS

2020



KELi PUMPS



INDEX

HB FOUNTAIN PUMPS	4
JHQ FOUNTAIN PUMPS	6



This document contains hyperlinks. If you are using the electronic PDF copy you do not need to go through the entire document to get to the required page, you can simply click on the required page on your index page. Click on the logo on top to return to the Index page.

FOUNTAIN PUMP

HB



APPLICATION

These pumps can be used in water features, fountains, aquariums and ponds for circulation.

They are highly energy efficient and have a long service life.

PERFORMANCE RANGE

Maximum head:	2m
Maximum flow:	1500L/h
Power:	16W & 28W

OPERATING LIMITS


Maximum liquid temperature:	40°C
Length of operating time:	Continuous duty



PERFORMANCE CHART

MODEL	OUTPUT POWER (W)	MAX HEAD (m)	MAX FLOW (l/h)	CABLE LENGTH (m)	PLUG
HB-410	13.5	1.5	800	1.5	2 point
HB-888	16.5	1.8	1000	1.5	2 point
HB-508	27	2.6	1500	1.5	2 point

PERFORMANCE CURVE

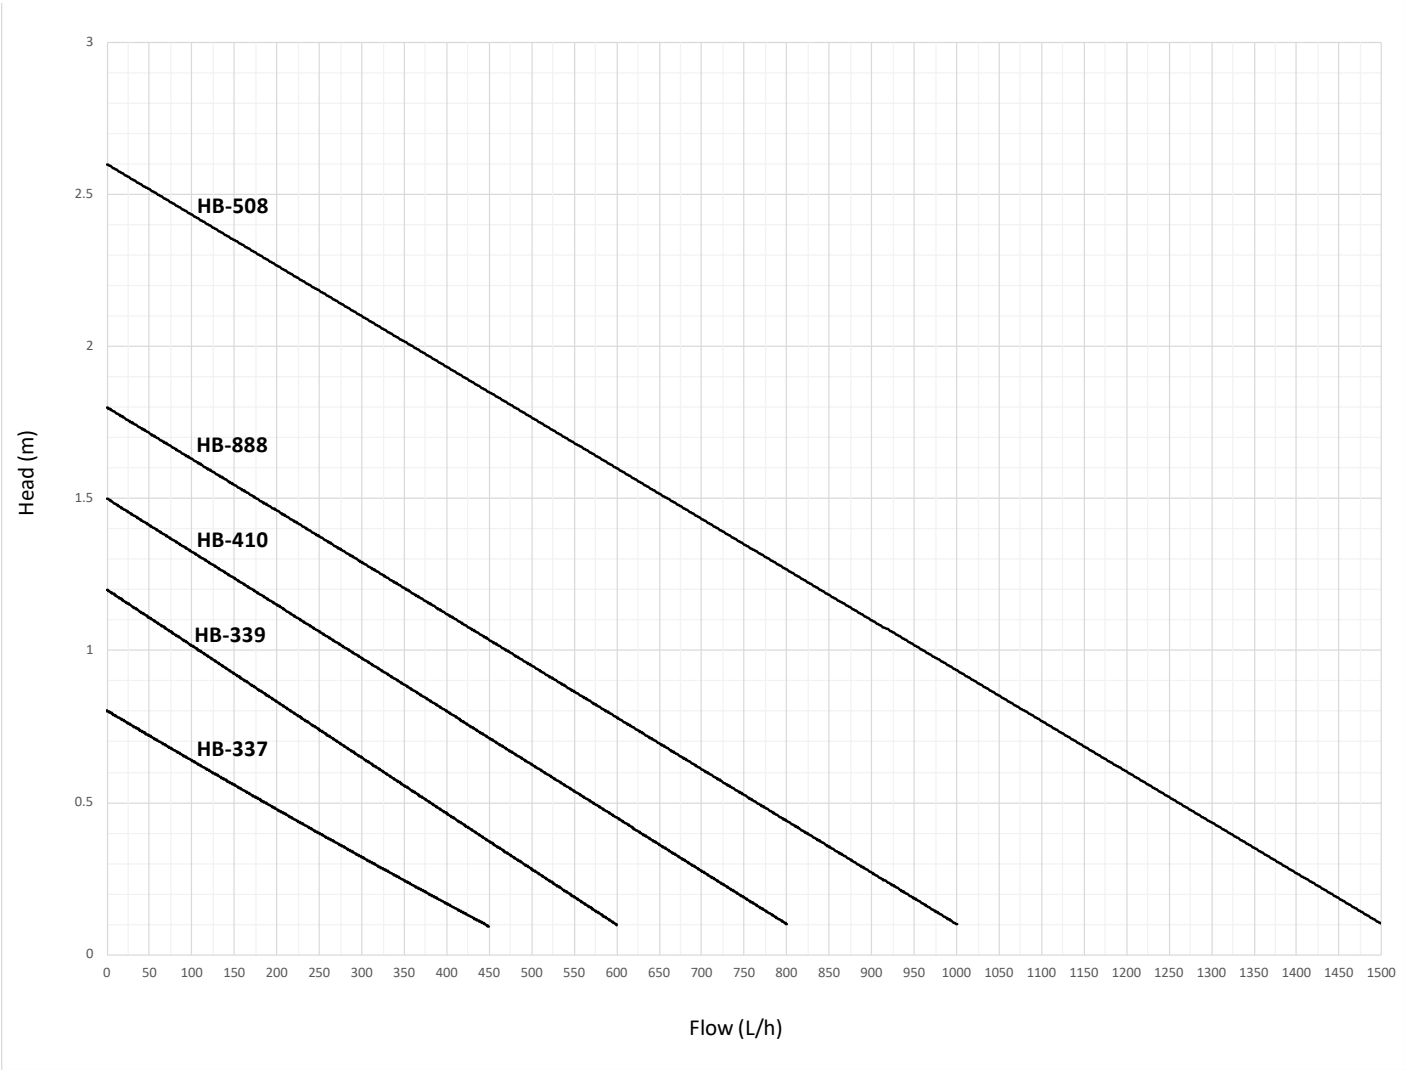

FOUNTAIN PUMP

JHQ



APPLICATION

These pumps can be used in water features, fountains, aquariums and ponds for circulation.

They are highly energy efficient and have a long service life.

PERFORMANCE RANGE

Maximum head:	2.5m
Maximum flow:	2000L/h
Power:	55W

OPERATING LIMITS

Maximum liquid temperature:	40°C
Length of operating time:	Continuous duty




PERFORMANCE CHART

MODEL	OUTPUT POWER (W)	MAX HEAD (m)	MAX FLOW (l/h)	CABLE LENGTH (m)	PLUG	WEIGHT (kg)	DIMENSIONS L x W x H (mm)
JHQ-2500	55	2.5	2000	3	3 point	1.2	153x105x135


PERFORMANCE CURVE



PERFORMANCE CURVES

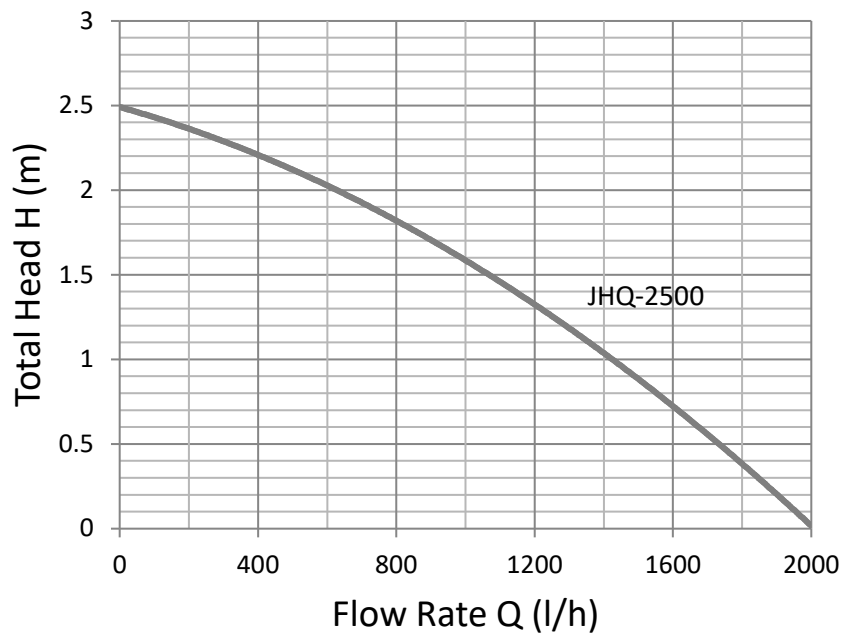

DIAGRAM

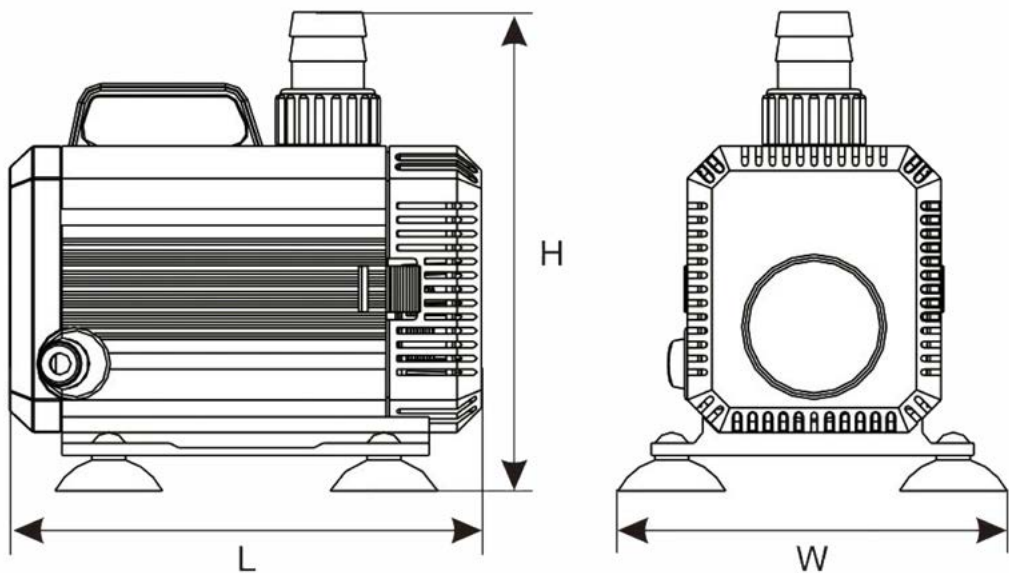

DIMENSIONS

MODEL	WEIGHT	L	W	H
JHQ-2500	1.2kg	153mm	105mm	135mm

